

ACT NOW !



# ALUPROP

Take advantage of our best, **high load-bearing capacity**, and **lightweight** aluminum post shore

ONE POST SHORE  
FOR ALL NEEDS




Call or text us today for more details at [973-653-0569](tel:973-653-0569) or email us to [sales@ulmaconstruction.us](mailto:sales@ulmaconstruction.us)

UP TO **45%**  
DISCOUNT

ON PURCHASE OF NEW EQUIPMENT

## MAIN FEATURES

- It meets multiple shoring requirements, **including re-shoring**
- **Lightweight Aluminum** post shore
- **High load capacity:** Up to 100 kN
- **Certified** post shore according to EN 16031
- Easily transform into **shoring towers** with additional bracing frames
- Easy and quick **length adjustment**
- **Safety:** provided by **unintentional disengagement design** for inner tube
- Collar nut thread designed to **easy evacuation of concrete**

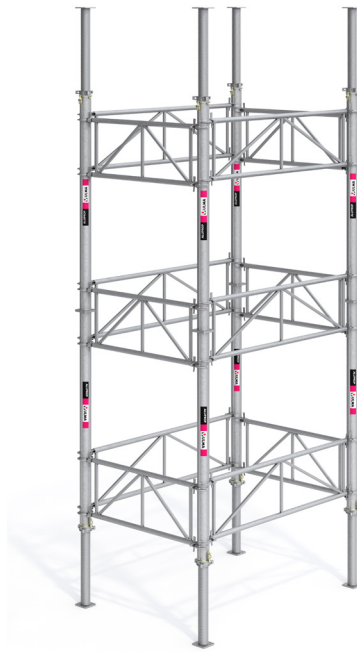

## ALUPROP RANGE

Up to 19 ft with a single post shore

- **ALUPROP** 1.65-2.8 (2220010)
- **ALUPROP** 2.2-3.7 (2220020)
- **ALUPROP** 3.3-4.8 (2220030)
- **ALUPROP** 4.5-6.0 (2220040)
- **SUPPLEMENT** 1 m (2220055)



When you buy from **ULMA**, you are buying **quality** products for years to come with **exceptional service** from a global industry leader.

Various **payment methods** available to meet your financial needs.



**Engineering support** for future projects. Efficient and tailor-made technical solutions.



**Training and Field Service** for correct and safe product use and assembly.



[www.ulmaconstruction.us](http://www.ulmaconstruction.us)

Offer also available for used material. Terms & Conditions apply.

03H209USM